

DATE	12/19/19	REV.	01/08/20	3 of 3
DRAWN BY	DAVE B	DECIDER	2020 SPEC	
 TORBORGS WAPACA LUMBER HOME SHOWCASE CENTER REGIONAL CONSULTANT WAPACA, NJ 07988				
These drawings have been prepared based on information furnished by the client. TORBORGS LUMBER, INC. does not warrant the accuracy or completeness of the information furnished. TORBORGS LUMBER, INC. is not responsible for any errors or omissions in these drawings. TORBORGS LUMBER, INC. is not responsible for any errors or omissions in these drawings. TORBORGS LUMBER, INC. is not responsible for any errors or omissions in these drawings.				

Q1/15/20
Q1/08/20

Year	Percentage of Population Aged 65 and Over
1950	7.0
1960	8.0
1970	9.0
1980	10.0
1990	11.0
2000	12.0
2010	13.0
2020	14.0
2030	15.0
2040	16.0
2050	17.0

[illegible]

[illegible]

LEV 1/2" = 1'

WHITE
SCALE: 1/8" = 1'-0"

[illegible][illegible][illegible]

10" - 11" **EVA**

REEL 10 SALE: 1

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

[illegible][illegible][illegible][illegible][illegible]

		z
--	---	---

1-0°

LEVEL : 110° -

OFFICE SCALE

LEI

[illegible]
























TORBOROS

TORBOROS WAPACA LUMBER

HOME SHOWCASE CENTER

WAPACA, WI 54984

TEL: 920.735.1555

FAX: 920.735.1555



DATE: 12/19/19


REV: 01/09/20

DRAWN BY: PAVE B

CHECKER: 2020 SPEC

OF 3

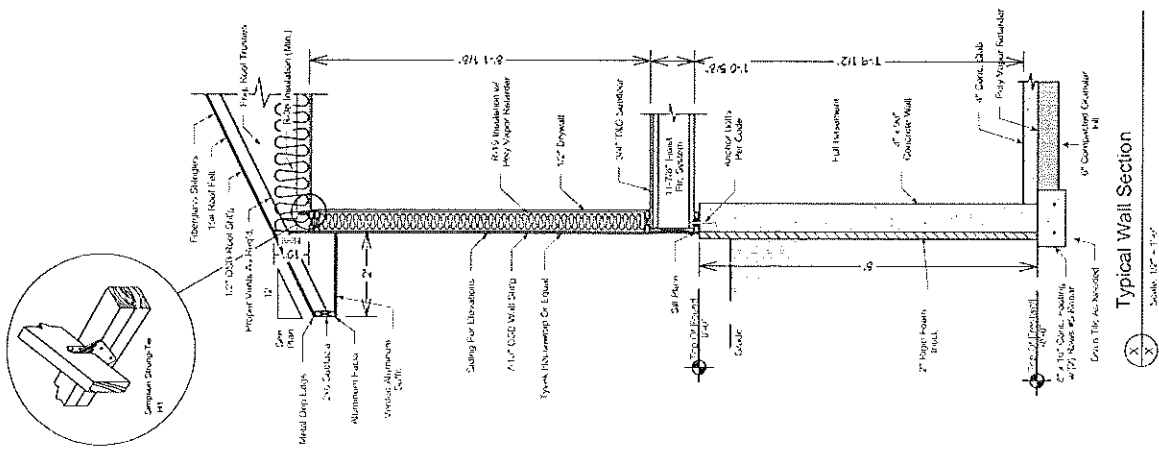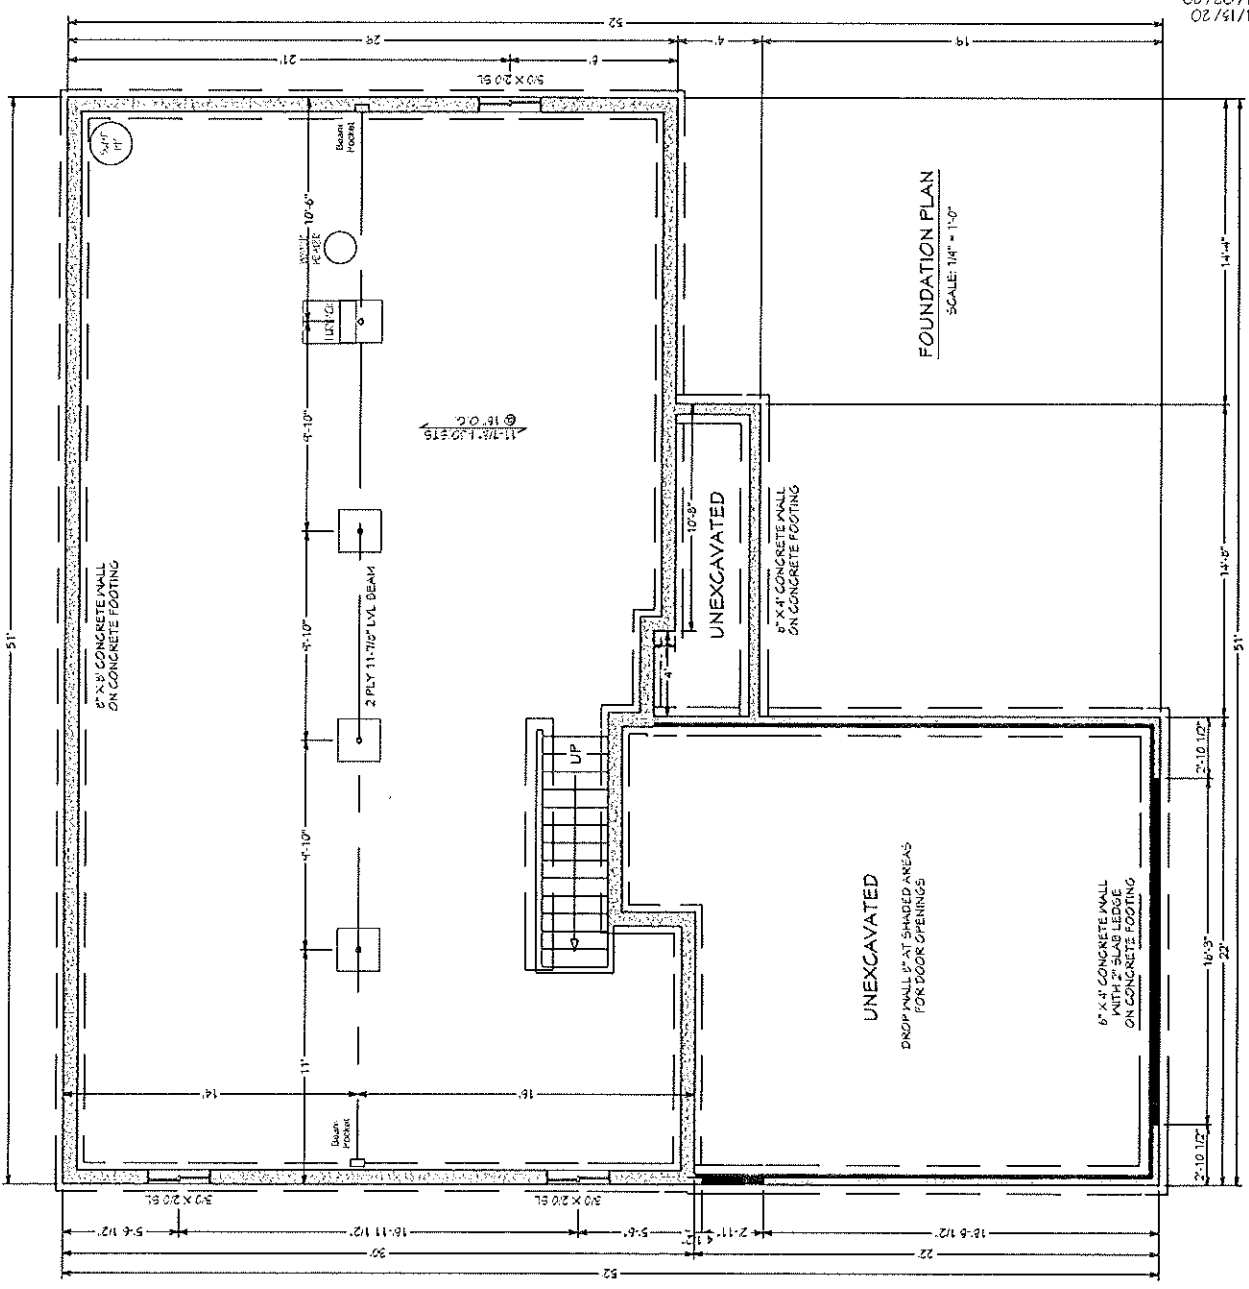




Job	Truss	Truss Type	Qty	Ply	Decker lot 11 - Roof	173015703
149325	T06	Roof Special	2	1	Job Reference (optional)	

Truss Pro3aposs, Inc., Britton, SD - 57430,

Run: 8.73 S Feb 19 2025 Print: 8.730 S Feb 19 2025 MiTek Industries, Inc. Thu Apr 24 15:54:28
ID:ueqrR_njaYHh67iGcuvIA7yMn6B-RfC?PsB70Hq3NSgPqntL8w3uITXbGKwCDo7J4zJC7f

Page: 1

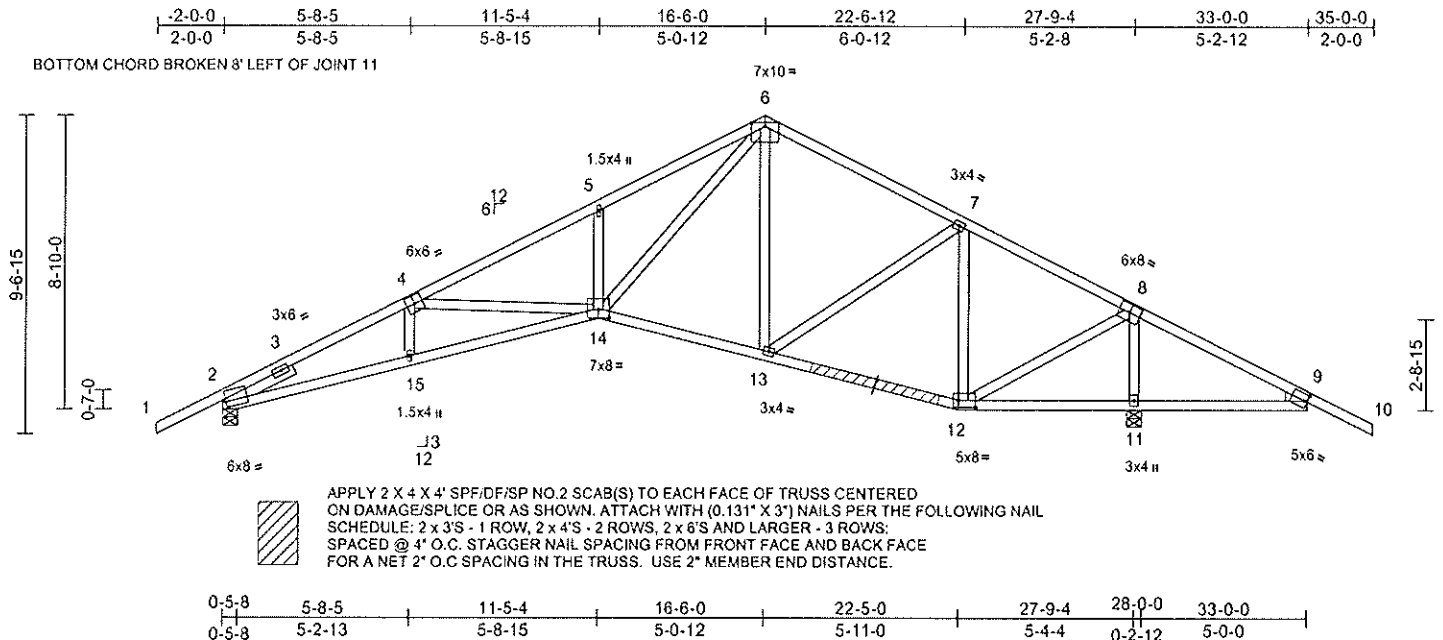

Scale = 1:66.6

Plate Offsets (X, Y): [2:0-1-2,0-2-15], [9:0-0-15,0-2-8], [12:0-6-4,0-2-8], [14:0-4-0,0-3-3]

Loading	(psf)	Spacing	2-0-0	CSI	DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL	40.0	Plate Grip DOL	1.15	TC	0.87	Vert(LL)	-0.36	14-15	>928	360	MT20
(Roof Snow = 40.0)		Lumber DOL	1.15	BC	0.86	Vert(CT)	-0.54	14-15	>620	240	197/144
TCOL	7.0	Rep Stress Incr	YES	WB	0.63	Horz(CT)	0.26	11	n/a	n/a	
BCLL	0.0	Code	IRC2015/TPI2014	Matrix-MS		Wind(LL)	0.17	14-15	>999	240	
BCOL	10.0										

Weight: 140 lb FT = 20%

LUMBER

TOP CHORD 2x4 SPF No.2 *Except* 1-4:2x4 SPF 1650F 1.5E
BOT CHORD 2x4 SPF No.2 *Except* 2-14:2x4 SPF 2100F 1.8E
WEBS 2x4 SPF No.2
WEDGE Right: 2x4 SPF No.2
SLIDER Left 2x4 SPF No.2 -- 2-5-0

BRACING

TOP CHORD Structural wood sheathing directly applied or 2-1-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 5-9-4 oc bracing.

REACTIONS

(size) 2-0-5-8, 11-0-5-8
Max Horiz 2=164 (LC 8)
Max Uplift 2=-274 (LC 8), 11=-361 (LC 9)
Max Grav 2=1679 (LC 1), 11=2459 (LC 1)

FORCES

(lb) - Maximum Compression/Maximum Tension
TOP CHORD 1-2=0/84, 2-5=-4044/643, 5-6=-3438/645, 6-7=-1584/283, 7-9=-1094/1039, 9-10=0/84
BOT CHORD 2-15=-644/3608, 14-15=-655/3639, 13-14=-771/1343, 12-13=-52/901, 11-12=-759/262, 9-11=-822/273
WEBS 7-12=-1048/149, 5-14=-565/252, 8-11=-2272/404, 8-12=-197/1881, 4-15=-19/172, 4-14=-547/223, 6-13=-264/94, 7-13=-29/524, 6-14=-513/2548

NOTES

- 1) Wind: ASCE 7-10; Vult=115mph (3-second gust)
Vasd=91mph; TCOL=4.2psf; BCCL=6.0psf; h=26ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) exterior zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) TCLL: ASCE 7-10; Pf=40.0 psf (flat roof snow); Category II; Exp C; Partially Exp.; Ct=1.10

- 3) This truss has been checked for uniform snow load only, except as noted.
- 4) This truss has been designed for greater of min roof live load of 16.0 psf or 1.00 times flat roof load of 40.0 psf on overhangs non-concurrent with other live loads.
- 5) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 6) All bearings are assumed to be SPF No.2.
- 7) Bearing at joint(s) 2 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 8) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 274 lb uplift at joint 2 and 361 lb uplift at joint 11.

LOAD CASE(S) Standard



WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MI-7473 rev. 1/2/2023 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see ANSI/TPIH Quality Criteria, and DSB-22 available from Truss Plate Institute (www.tpiinst.org) and BCSI Building Component Safety Information available from the Structural Building Component Association (www.sbcsccomponents.com)

MiTek

16023 Svingley Ridge Rd.
Chesterfield, MO 63017
314.434.1200 / MiTek-US.com

Job	Truss	Truss Type	Qty	Ply	Decker lot 11 - Roof
149325	T06	Roof Special	2	1	TORBORG LUMBER WAUPACA

Automated Products Inc, Marshfield, WI

Run: 8.51 S Sep 23 2021 Print: 8.510 S Sep 23 2021 MiTek Industries, Inc. Thu Dec 09 07:55:55

Page: 1

ID:ueerR niaYHh67tGcuMA?vMn6B-a2sT4 vboTboXU1xbRqHAvx?0moSod4VvMkUUvAm0I

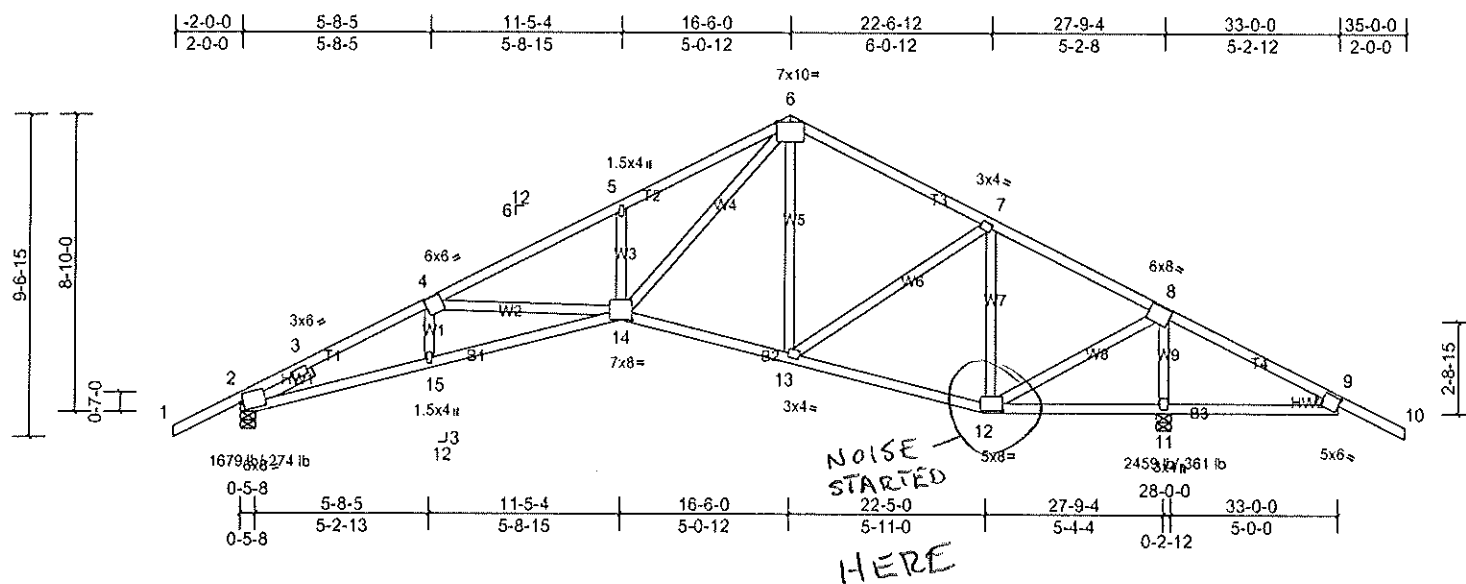


Plate Offsets (X, Y): [2:0-1-2,0-2-15], [9:0-0-15,0-2-8], [12:0-6-4,0-2-8], [14:0-4-0,0-3-3]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL	40.0	Plate Grip DOL	1.15	TC	0.87	Vert(LL)	-0.36	14-15	>927	360	MT20	197/144
(Roof Snow = 40.0)		Lumber DOL	1.15	BC	0.86	Vert(CT)	-0.54	14-15	>620	240		
TCDL	7.0	Rep Stress Incr	YES	WB	0.63	Horz(CT)	0.26	11	n/a	n/a		
BCLL	0.0	Code	IRC2015/TPI2014	Matrix-MS		Wind(LL)	0.17	14-15	>999	240		
BCDL	10.0											
											Weight: 140 lb	FT = 20%

Weight: 140 lb FT = 20%

LUMBER

TOP CHORD 2x4 SPF No.2 *Except* T1:2x4 SPF 1650F 1.5E
 BOT CHORD 2x4 SPF No.2 *Except* B1:2x4 SPF 2100F 1.8E
 WEBS 2x4 SPF No.2
 WEDGE Right: 2x4 SPF No.2
 SLIDER Left 2x4 SPF No.2 - 2-5-0

BRACING

TOP CHORD Structural wood sheathing directly applied or 2-1-0 cc purlins.
 BOT CHORD Rigid ceiling directly applied or 5-9-4 cc bracing.

REACTIONS (lb/size) 2=1679/0-5-8, (min. 0-2-10), 11=2459/0-5-8, (min. 0-3-14)

Max Horiz 2=164 (LC 8)

Max Uplift 2=-274 (LC 8), 11=-361 (LC 9)

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-1660/168, 3-4=-4044/643, 4-5=-3400/513, 5-6=-3438/645, 6-7=-1584/283, 7-8=-1094/183, 8-9=-213/1039

BOT CHORD 2-15=-644/3608, 14-15=-655/3639, 13-14=-77/1343, 12-13=-52/901, 11-12=-759/262, 9-11=-822/273

WEBS 7-12=-1048/149, 5-14=-565/252, 8-11=-2272/404, 8-12=-197/1881, 4-14=-547/223, 6-13=-264/94, 7-13=-29/524, 6-14=-513/2548

NOTES

- 1) Wind: ASCE 7-10; Vult=115mph (3-second gust) Vasd=91mph; TCDL=4.2psf; BCDL=6.0psf; h=26ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) exterior zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) TCLL: ASCE 7-10; Pf=40.0 psf (flat roof snow); Category II; Exp C; Partially Exp.; Ct=1.10
- 3) This truss has been checked for uniform snow load only, except as noted.

- 4) This truss has been designed for greater of min roof live load of 16.0 psf or 1.00 times flat roof load of 40.0 psf on overhangs non-concurrent with other live loads.
- 5) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 6) Bearing at joint(s) 2 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 274 lb uplift at joint 2 and 361 lb uplift at joint 11.
- 8) This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.

LOAD CASE(S) Standard


Job	Truss	Truss Type	Qty	Ply	Decker lot 11 - Roof
149325	T07	Roof Special	5	1	TORBORGS LUMBER WAUPACA

Automated Products Inc, Marshfield, WI

Run: 8.51 S Sep 23 2021 Print: 8.510 S Sep 23 2021 MiTek Industries, Inc. Thu Dec 09 07:55:56

Page: 1

ID: A1Z19cV82BjNxo jBEHivMn7h-2EQrlKwDbmih9ec799LW9TAwE7BoG7DiZ6I0vAm0H

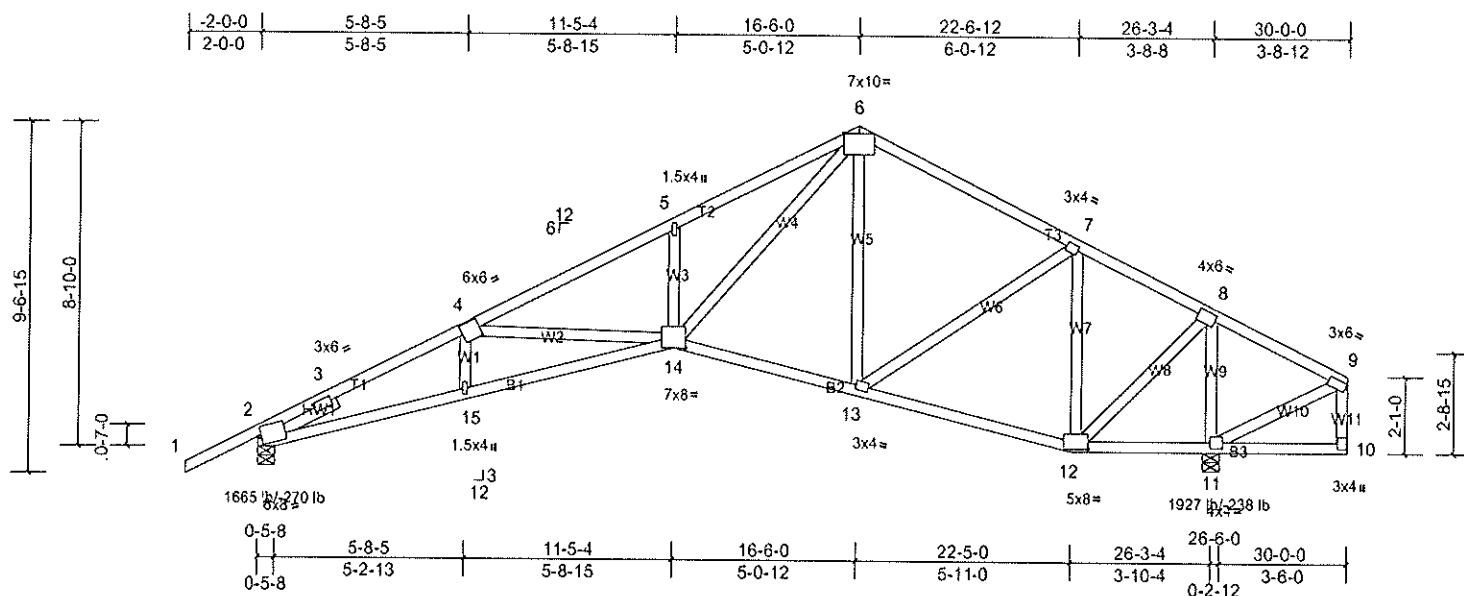

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL	40.0	Plate Grip DOL	1.15	TC	0.86	Vert(LL)	-0.35	14-15	>913	360	MT20	197/144
(Roof Snow = 40.0)		Lumber DOL	1.15	BC	0.85	Vert(CT)	-0.51	14-15	>614	240		
TCDL	7.0	Rep Stress Incr	YES	WB	0.62	Horz(CT)	0.26	11	n/a	n/a		
BCLL	0.0	Code	IRC2015/TPI2014	Matrix-MS		Wind(LL)	0.17	14-15	>999	240		
BCDL	10.0											
											Weight: 136 lb FT = 20%	

Weight: 136 lb FT = 20%

LUMBER

TOP CHORD 2x4 SPF No.2 *Except* T1:2x4 SPF 1650F 1.5E
 BOT CHORD 2x4 SPF No.2 *Except* B1:2x4 SPF 2100F 1.8E
 WEBS 2x4 SPF No.2
 SLIDER Left 2x4 SPF No.2 -- 2-5-0

BRACING

TOP CHORD Structural wood sheathing directly applied or 2-1-15 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- Bearing at joint(s) 2 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 270 lb uplift at joint 2 and 238 lb uplift at joint 11.
- This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.

LOAD CASE(S) Standard

REACTIONS (lb/size) 2=1665/0-5-8, (min. 0-2-10),
 11=1927/0-5-8, (min. 0-3-0)

Max Horiz 2=185 (LC 12)
 Max Uplift 2=-270 (LC 8), 11=-238 (LC 9)

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250
 (lb) or less except when shown.

TOP CHORD 2-3=-1639/169, 3-4=-3995/644,
 4-5=-3342/515, 5-6=-3380/647,
 6-7=-1545/277, 7-8=-978/169, 8-9=-31/265

BOT CHORD 2-15=-663/3564, 14-15=-674/3594,
 13-14=-90/1307, 12-13=-60/837

WEBS 4-14=-555/222, 5-14=-564/252,
 6-14=-523/2522, 6-13=-290/105,
 7-13=-42/556, 7-12=-1051/152,
 8-12=-124/1359, 8-11=-1735/259

NOTES

- Wind: ASCE 7-10; Vult=115mph (3-second gust)
 Vasd=91mph; TCDL=4.2psf; BCDL=6.0psf; h=26ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) exterior zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- TCLL: ASCE 7-10; Pf=40.0 psf (flat roof snow); Category II; Exp C; Partially Exp.; Ct=1.10
- This truss has been checked for uniform snow load only, except as noted.
- This truss has been designed for greater of min roof live load of 16.0 psf or 1.00 times flat roof load of 40.0 psf on overhangs non-concurrent with other live loads.

Job	Truss	Truss Type	Qty	Ply	Decker lot 11 - Roof
149325	T05	Roof Special	1	1	TORBORG LUMBER WAUPACA

Automated Products Inc, Marshfield, WI

Run: 8.51 S Sep 23 2021 Print: 8.510 S Sep 23 2021 MiTek Industries, Inc. Thu Dec 09 07:55:55

Page: 1

ID:ov0wkQ0035HU0QJrFAI5ovMn 7-a2sT4 vbaTbaXU1xbRcHAvaZlmi5o84VvMkUUvAm0l

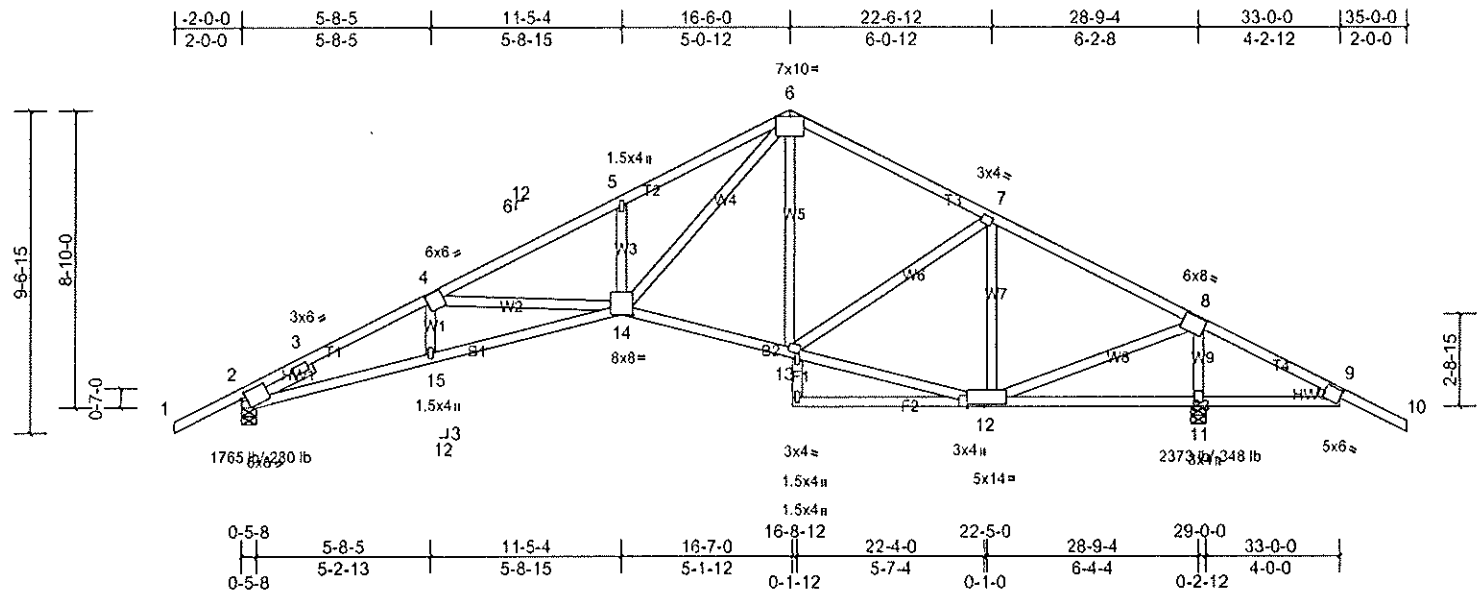


Plate Offsets (X, Y): [2:0-1-12,0-1-11], [9:0-0-15,0-2-8], [14:0-4-0,0-3-3], [17:0-0-4,Edge]

Loading	(psf)	Spacing	2-0-0	CSI		DEFL	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL	40.0	Plate Grip DOL	1.15	TC	0.98	Vert(LL)	-0.40	14-15	>868	360	MT20	197/144
(Roof Snow = 40.0)		Lumber DOL	1.15	BC	0.93	Vert(CT)	-0.59	14-15	>583	240		
TCDL	7.0	Rep Stress Incr	YES	WB	0.66	Horz(CT)	0.28	11	n/a	n/a		
BCLL	0.0	Code	IRC2015/TPI2014	Matrix-MS		Wind(LL)	0.19	14-15	>999	240		
BCDL	10.0											
Weight: 148 lb											FT = 20%	

LUMBER

TOP CHORD 2x4 SPF No.2 'Except' T1:2x4 SPF 1650F

1.5E

BOT CHORD 2x4 SPF No.2 'Except' B1:2x4 SPF 2100F

1.8E

WEBS 2x4 SPF No.2

WEDGE Right: 2x4 SPF No.2

SLIDER Left 2x4 SPF No.2 -- 2-5-0

BRACING

TOP CHORD Structural wood sheathing directly applied.

BOT CHORD Rigid ceiling directly applied or 2-2-0 oc bracing.

5) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.

6) Bearing at joint(s) 2 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.

7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 280 lb uplift at joint 2 and 348 lb uplift at joint 11.

8) This truss is designed in accordance with the 2015 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.

LOAD CASE(S) Standard

REACTIONS (lb/size) 2=1765/0-5-8, (min. 0-2-12), 11=2373/0-5-8, (min. 0-3-12)

Max Horiz 2=164 (LC 12)

Max Uplift 2=-280 (LC 8), 11=-348 (LC 9)

FORCES (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-1782/178, 3-4=-4331/665, 4-5=-3734/539, 5-6=-3775/671, 6-7=-1811/301, 7-8=-1512/210, 8-9=-192/883

BOT CHORD 2-15=-663/3865, 14-15=-675/3899, 13-14=-93/1547, 12-13=-81/1272, 11-12=-619/228, 9-11=-692/242

WEBS 4-14=-498/219, 5-14=-570/253, 7-12=-925/146, 8-11=-2209/410, 8-12=-207/1996, 6-14=-525/2703, 7-13=-19/338

NOTES

- 1) Wind: ASCE 7-10; Vult=115mph (3-second gust) Vasd=91mph; TCDL=4.2psf; BCDL=6.0psf; h=26ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) exterior zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) TCLL: ASCE 7-10; Pf=40.0 psf (flat roof snow); Category II; Exp C; Partially Exp.; Ct=1.10
- 3) This truss has been checked for uniform snow load only, except as noted.
- 4) This truss has been designed for greater of min roof live load of 16.0 psf or 1.00 times flat roof load of 40.0 psf on overhangs non-concurrent with other live loads.