


Lifetime SOFFIT PANELS

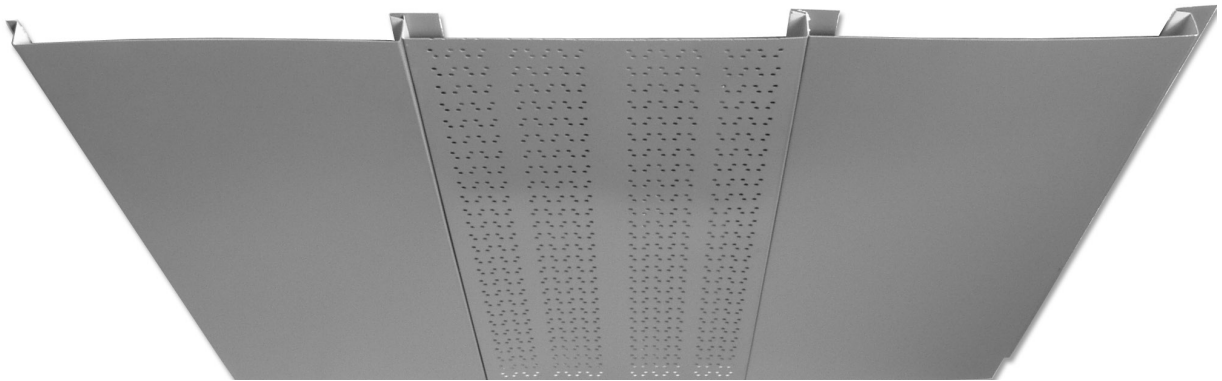

FEATURES & BENEFITS

- 12 5/8" coverage panels
- Available as perforated and solid panels
- 17 sq. in. free air flow per lineal foot of perforated panel
- Provides increased ventilation
- Concealed fasteners
- Simple installation - slides into C-channel flashings
- Custom cut to length: 2'0" to 50'0"


MATERIAL SPECIFICATIONS

- 26 gauge Kynar 500® Painted Steel
.0187" Steel (thickness prior to painting)
Per ASTM A-653-94
Grade A
G-90 Galvanizing
- 24 gauge Kynar 500® Painted Steel
.0236" (thickness prior to painting)
Per ASTM A-653-94
G-90 Galvanizing
- 16 ounce Copper
Per ASTM B-370


FINISHES

- 14 Standard Colors
- 4 Metallic Colors
- Kynar® 500 Paint System – the ultimate in exterior durability and color retention
- Top of the line, two-coat, 70% resin finish, applied to a 1 mil. thickness
- 30-year paint warranty includes:
 - fading
 - chalking
 - chipping
 - cracking
 - peeling

PANEL PROFILE

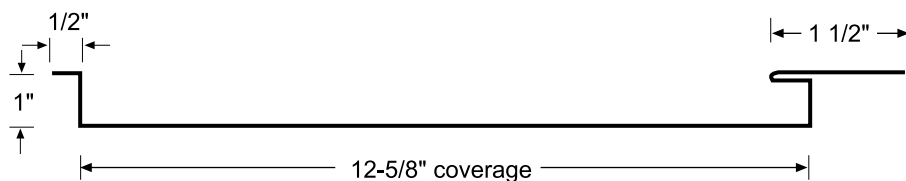

LOCK SEAM DETAIL

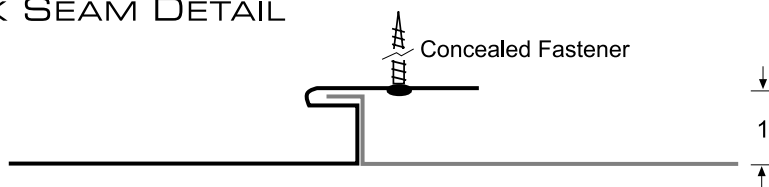

**TAYLOR**
METAL PRODUCTS

4566 Ridge Dr NE Salem R 97301
503-581-8338 or 1-800-574-1388
taylormetal.com